




Add: No. 5, Building 2, Area A, International Ceramics & Sanitary Ware City, 78i Hua West Road, Chancheng District, Foshan, Guangdong, China

Tel: +86-757-82520572 Fax: +86-757-82520531 E-mail: info@giania.net
web: www.giania.net



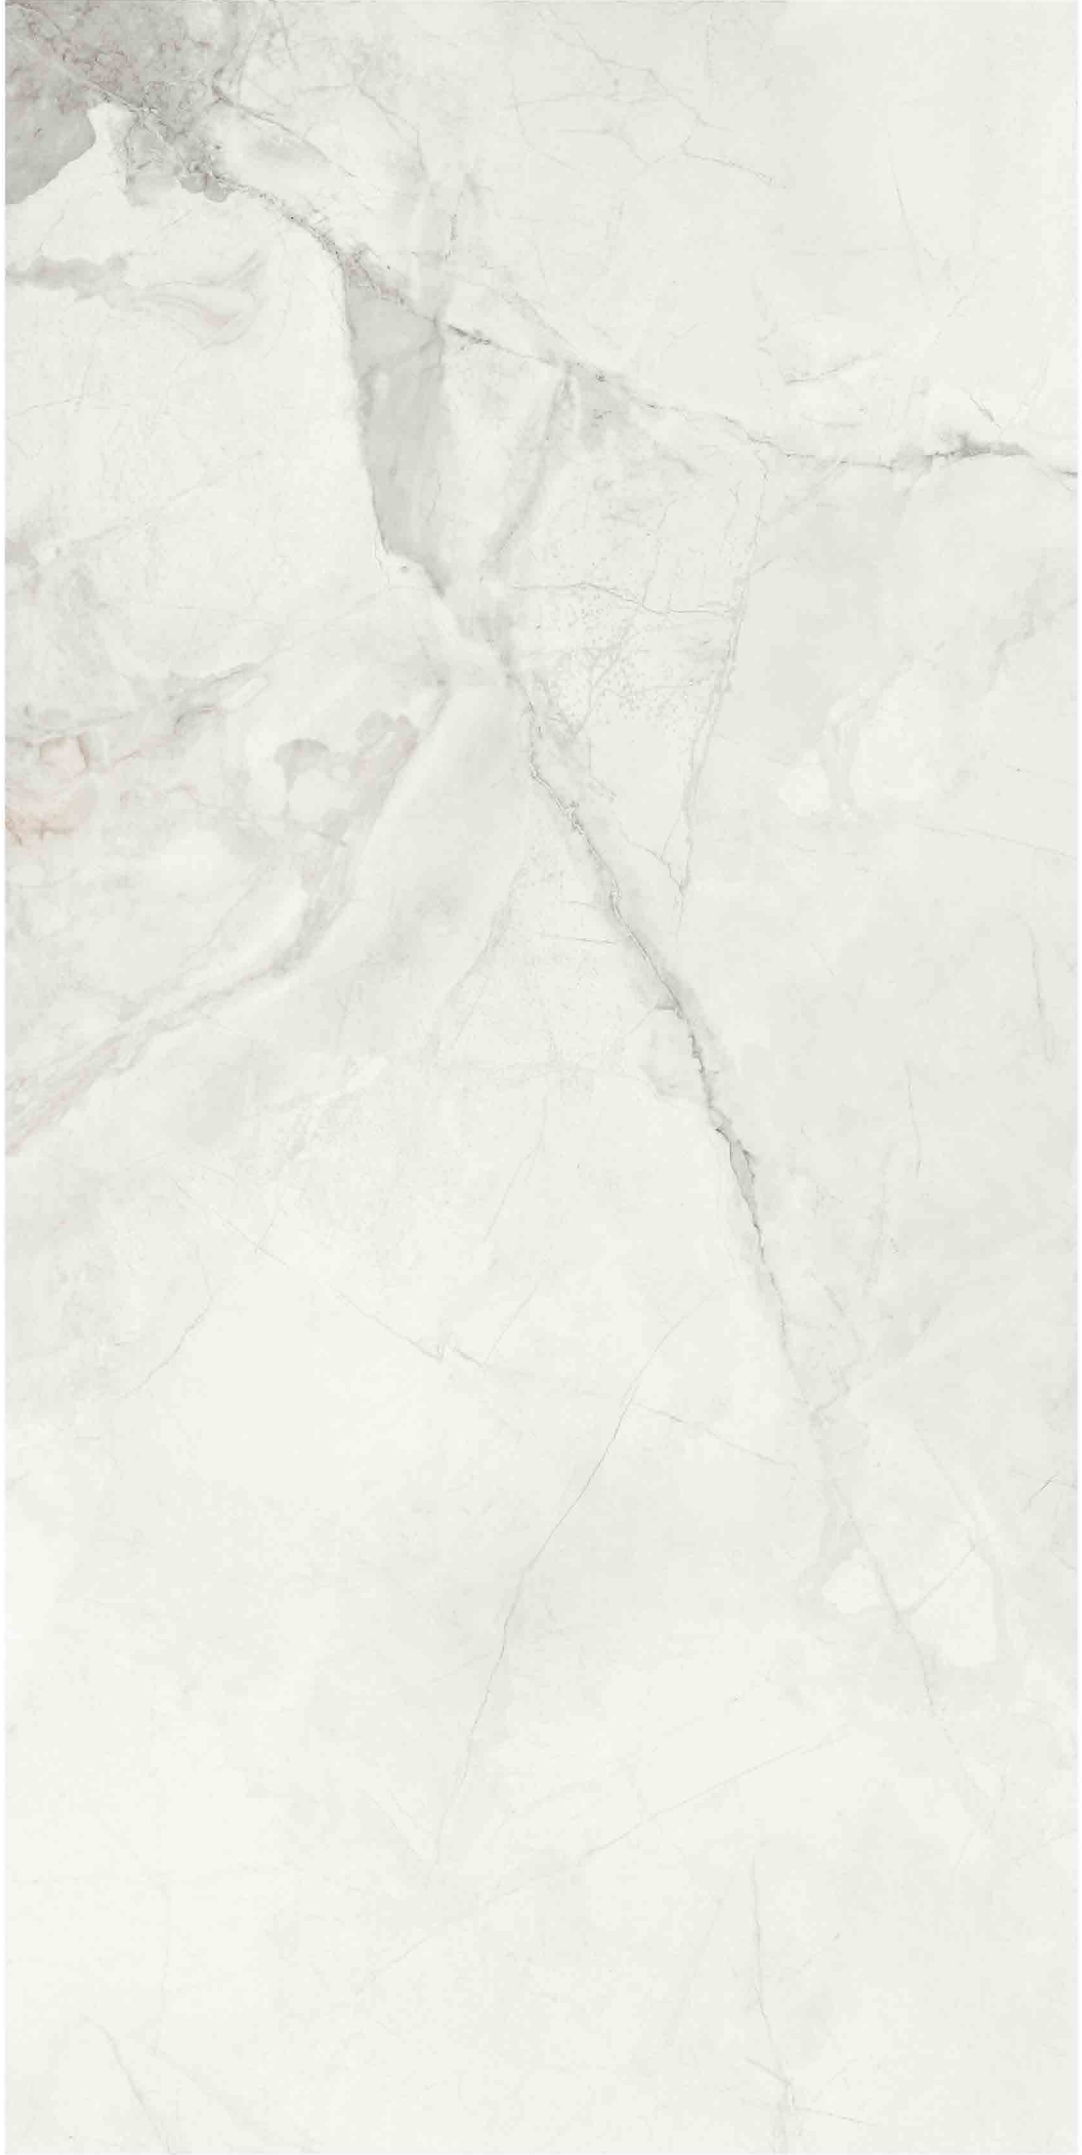

“

MO



size:600x1200x10.5mm /24"x48"
750x1500x10.5mm /30"x59"

9 design patternss


Process: Honed finish

 **Truonghinh®**
CERAMICS





Freeze, pristine snow, there is a kind of stone material, after high temperature baptism in ten million, crack open spreads along with the gender, mountain water, frantic sort of artistic conception, out in the ink painting with gray texture soft, vibrant, mold fine suede, elegant and exquisite moist the young fashion sense of individuality, and revealed her, Mo is marble, a pure natural, intoned.

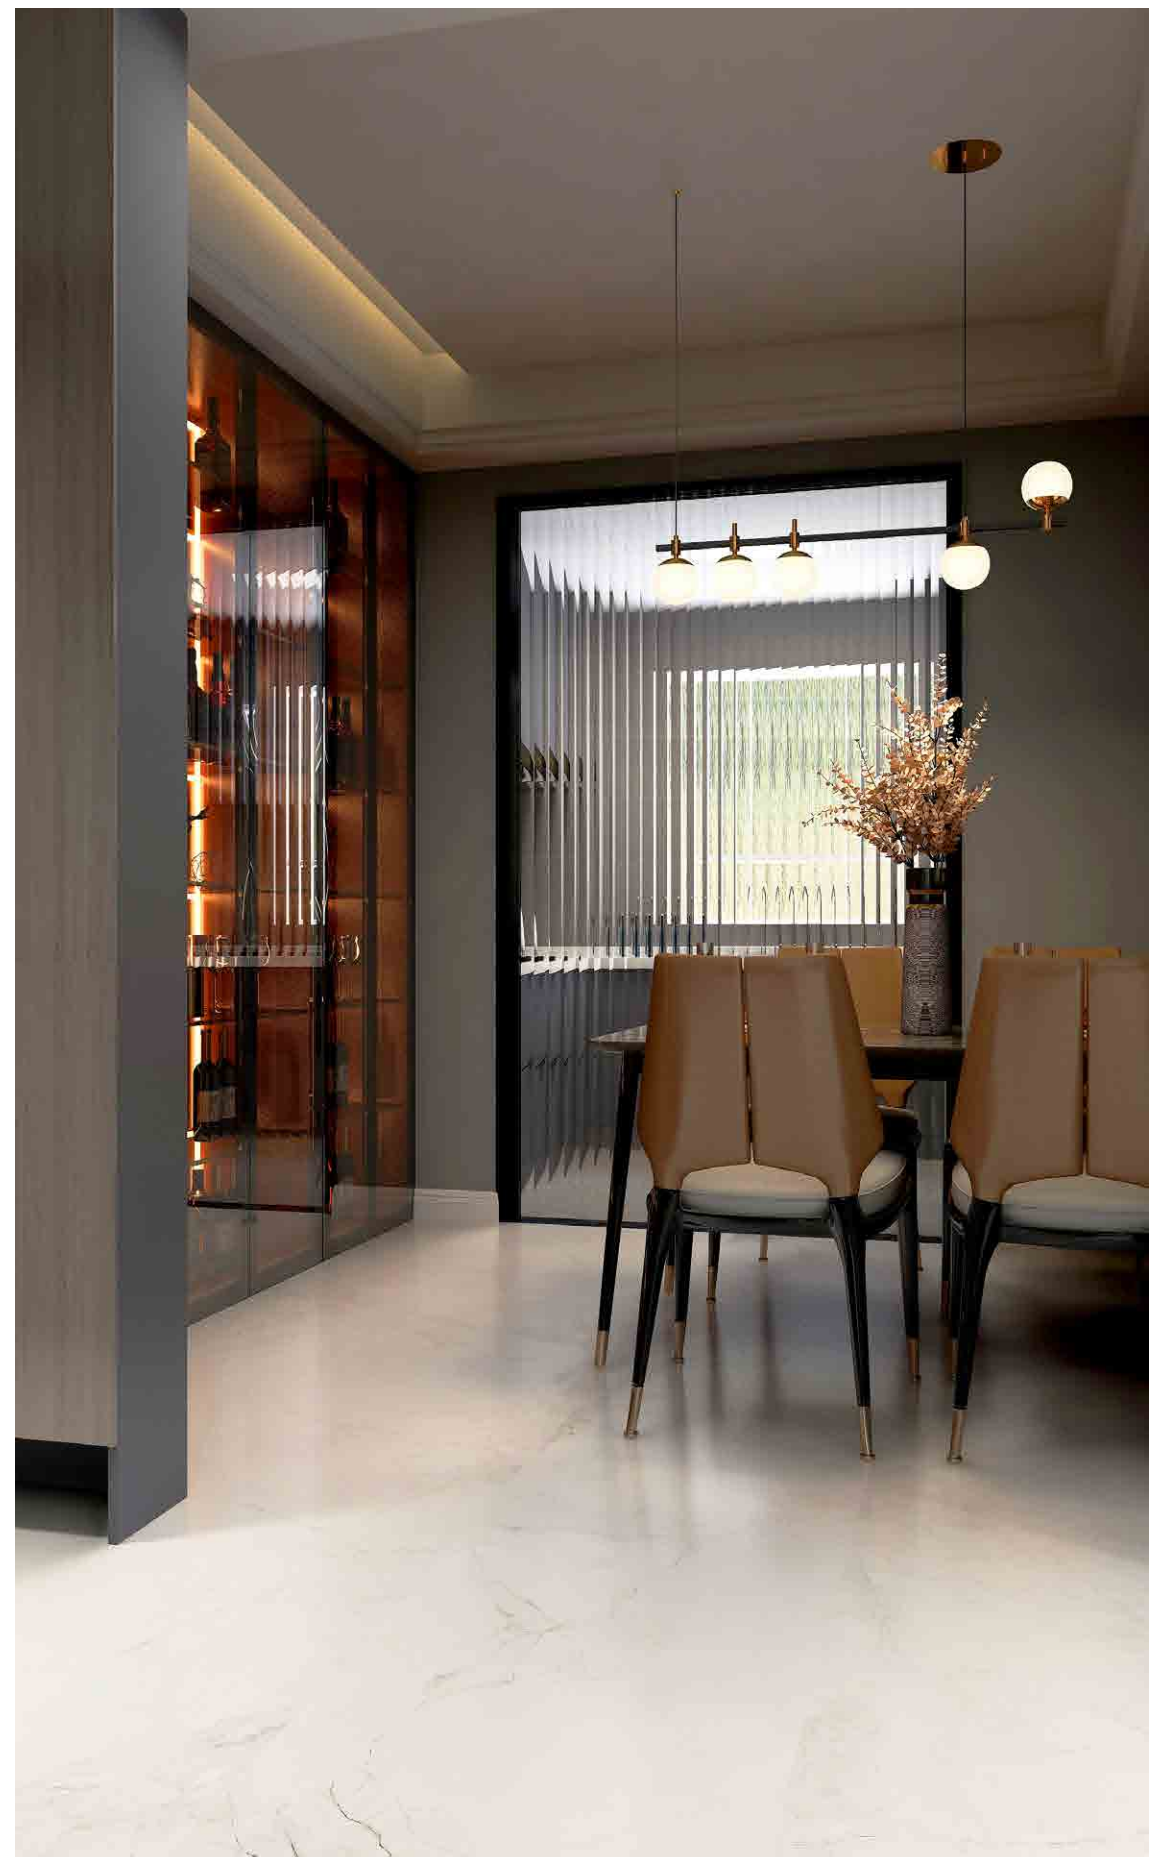







The artistic conception of splashing ink like mountain water,
The gray texture of ink is gently spread out,
Vibrant,
Mold fine suede,
The fashion sense that reveals young individual character again in elegant and delicate moist.







She

Jade-like white key, clean, clear
The layers of texture are gently layered
Transition soft








It's comfortable, it's pleasant, it's comfortable, it's inspiring.
As the golden years slide through the fingertips,
The rich texture is full of nature.





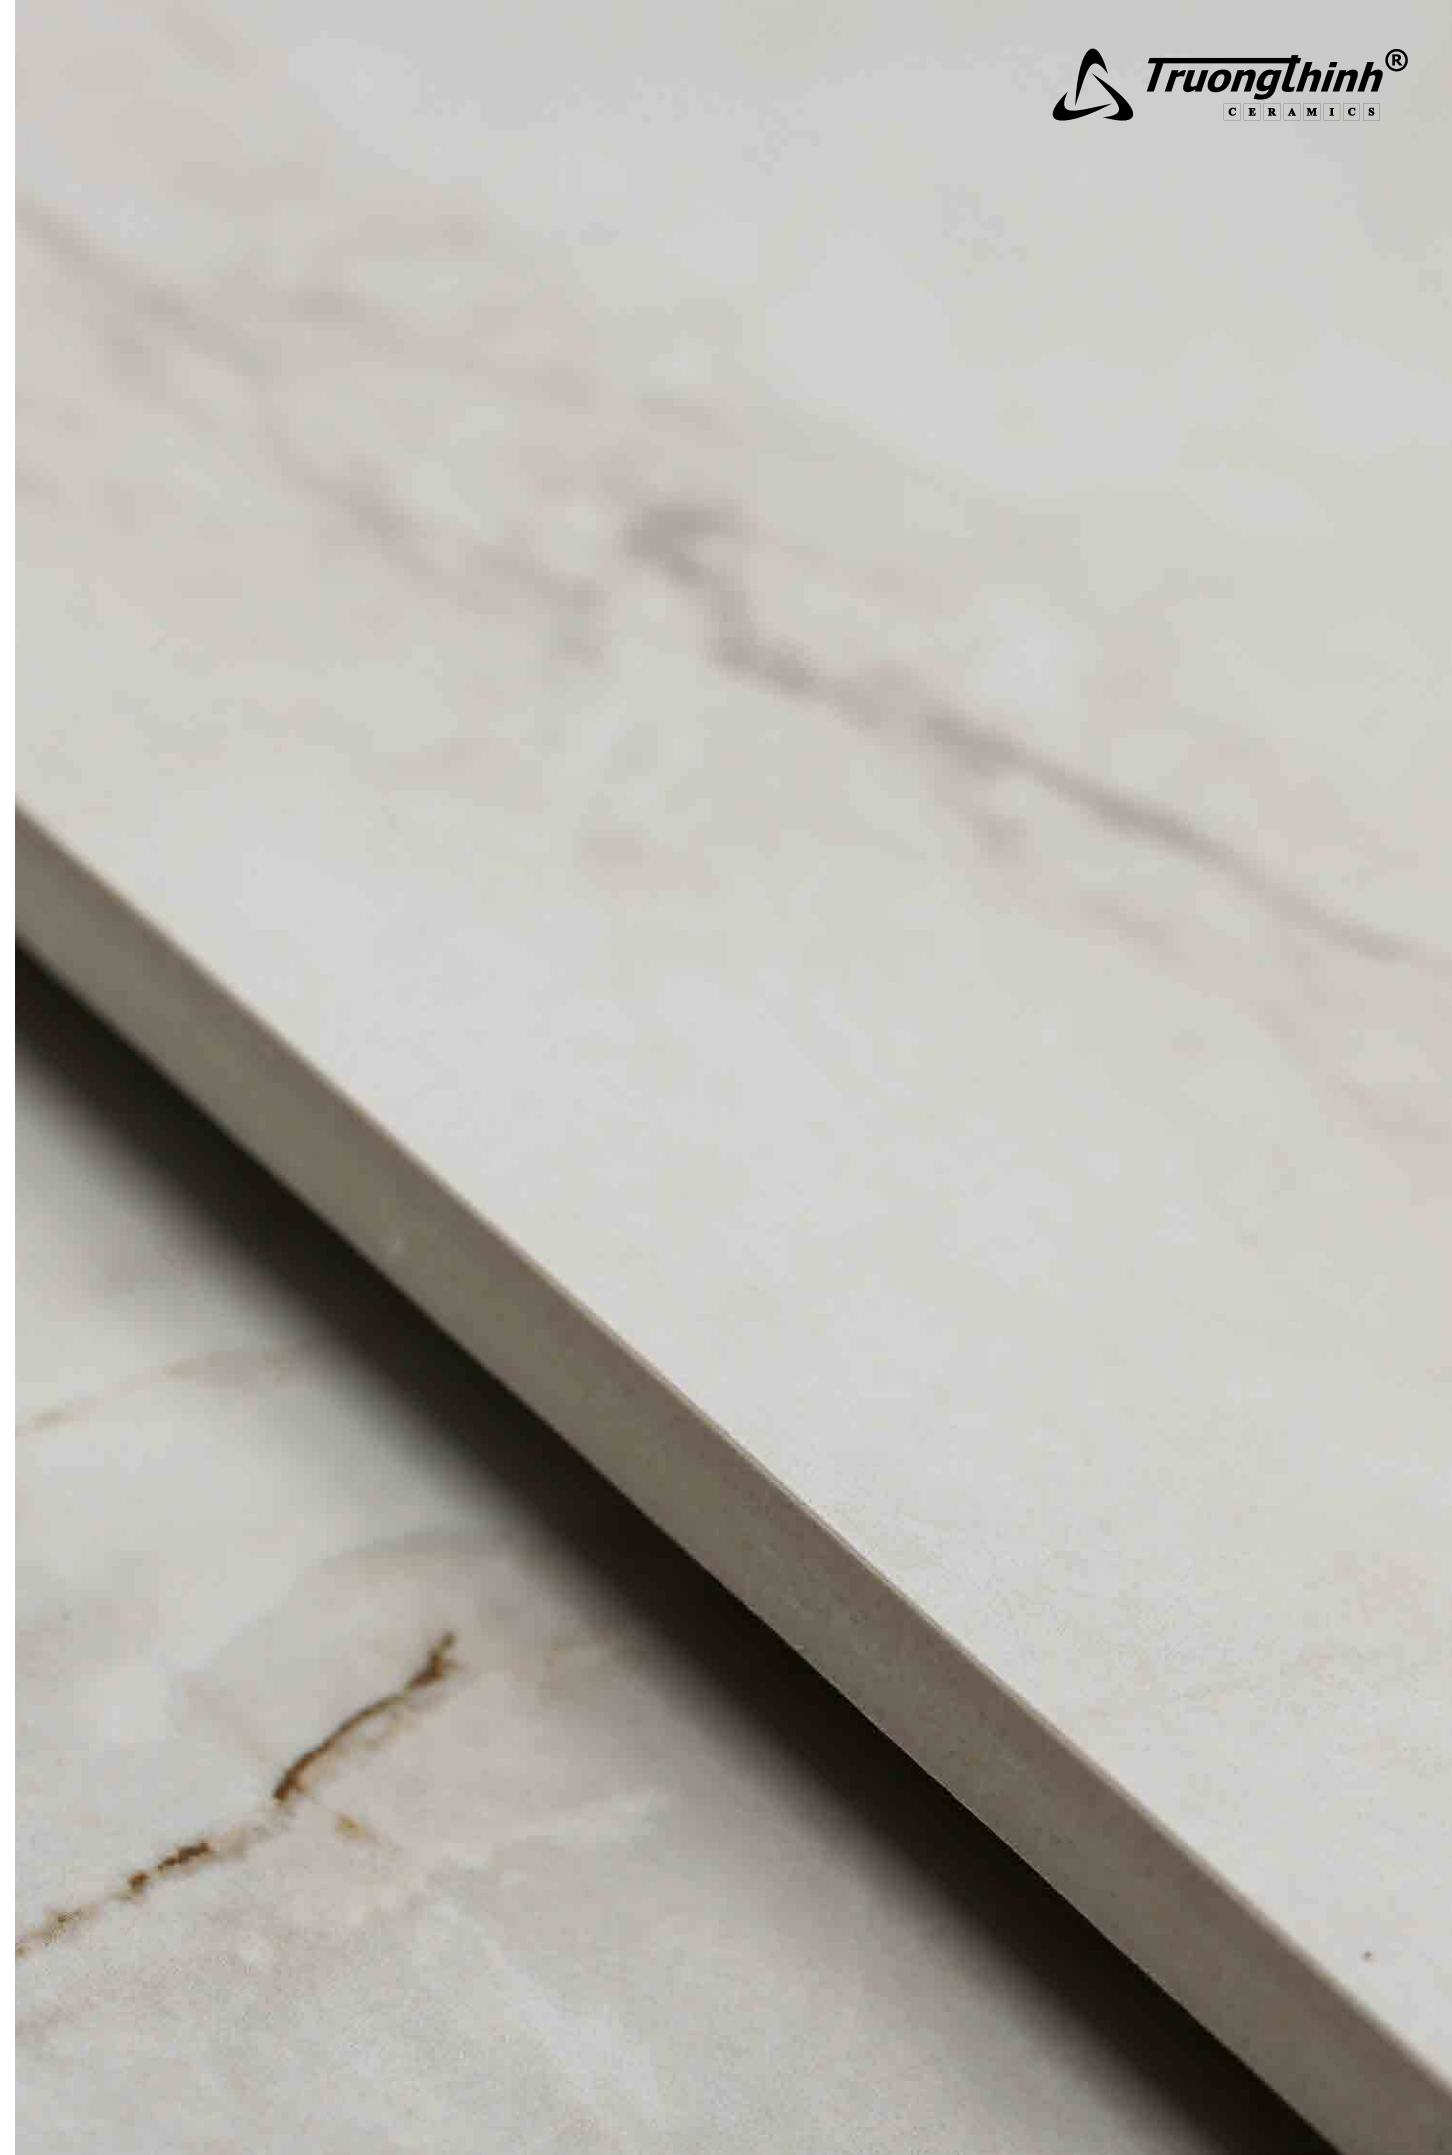















TECHNICAL PARAMETERS

		EU NORM	PRC NORM	PRODUCT PERFORMANCE
	LENGTH	± 0.6	± 0.5%	± 0.5%
	WIDTH	± 0.6	± 0.5%	± 0.5%
	THICKNESS	± 0.5	± 5%	± 5%
	SURFACE FLATNESS	± 0.5	± 0.4%	± 0.4%
	STRAIGHTNESS OF SIDES	± 0.5	± 0.3%	± 0.3%
	RECTANGULARITY	± 0.6	± 0.5%	± 0.5%
	WATER ABSORPTION	E≤0.5% individual Maximum 0.6%	Average≤0.5% Individual 0.6%	Average≤0.5%
	BREAKING STRENGTH	≥1300N	≥1300N	≥1300N
	MODULUS OF RUPTURE	≥35N/mm ²	≥35Mpa	≥35Mpa
	STAIN RESISTANCE	EN187: Class A Minimum Grade B	≥ Grade B	Pass
	ABRASION RESISTANCE	≤ 175mm ³	Report the Attrition Grade Turnover Number	Pass
	FROST RESISTANCE	No Crack at Freeze-Thaw Cycles for 100 Times(-5°C-5°C)	No Cracks Or Exfoliation After testing	Pass

PACKING DETAILS

SERIES	SIZE	PCS/CTN	SQM/CTN	KG/CTN	CTNS/PALLET	SQM/PALLET	KG/PALLET
MO	600X1200mm 24"X48"	2	1.44	36	56	80.64	1604/1028

SERIES	SIZE	PCS/CTN	SQM/CTN	KG/CTN	CTNS/PALLET	SQM/PALLET	KG/PALLET
MO	750X1500mm 30"X59"	2	2.25	56	40	90	2240